

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	V3	REVISED PER ECR-25-255998	15SEP2025	SA	DSC

- 1

STAMP AMP 12-10*, 6-9 APPROX AS SHOWN
- 2


WIRE INSULATION DIA: .150-.250
- 3

TONGUE MATERIAL THK IS 1.02±0.05 [.040±.002]
- 4

MATERIAL: BODY; COPPER PER ASTM B152
INSULATION; PVC
COLOR; YELLOW
- 5

FINISH: BODY; TIN PL. PER ASTM B545

 WIRE RANGE	 Listed	 LR7189 Certified
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED

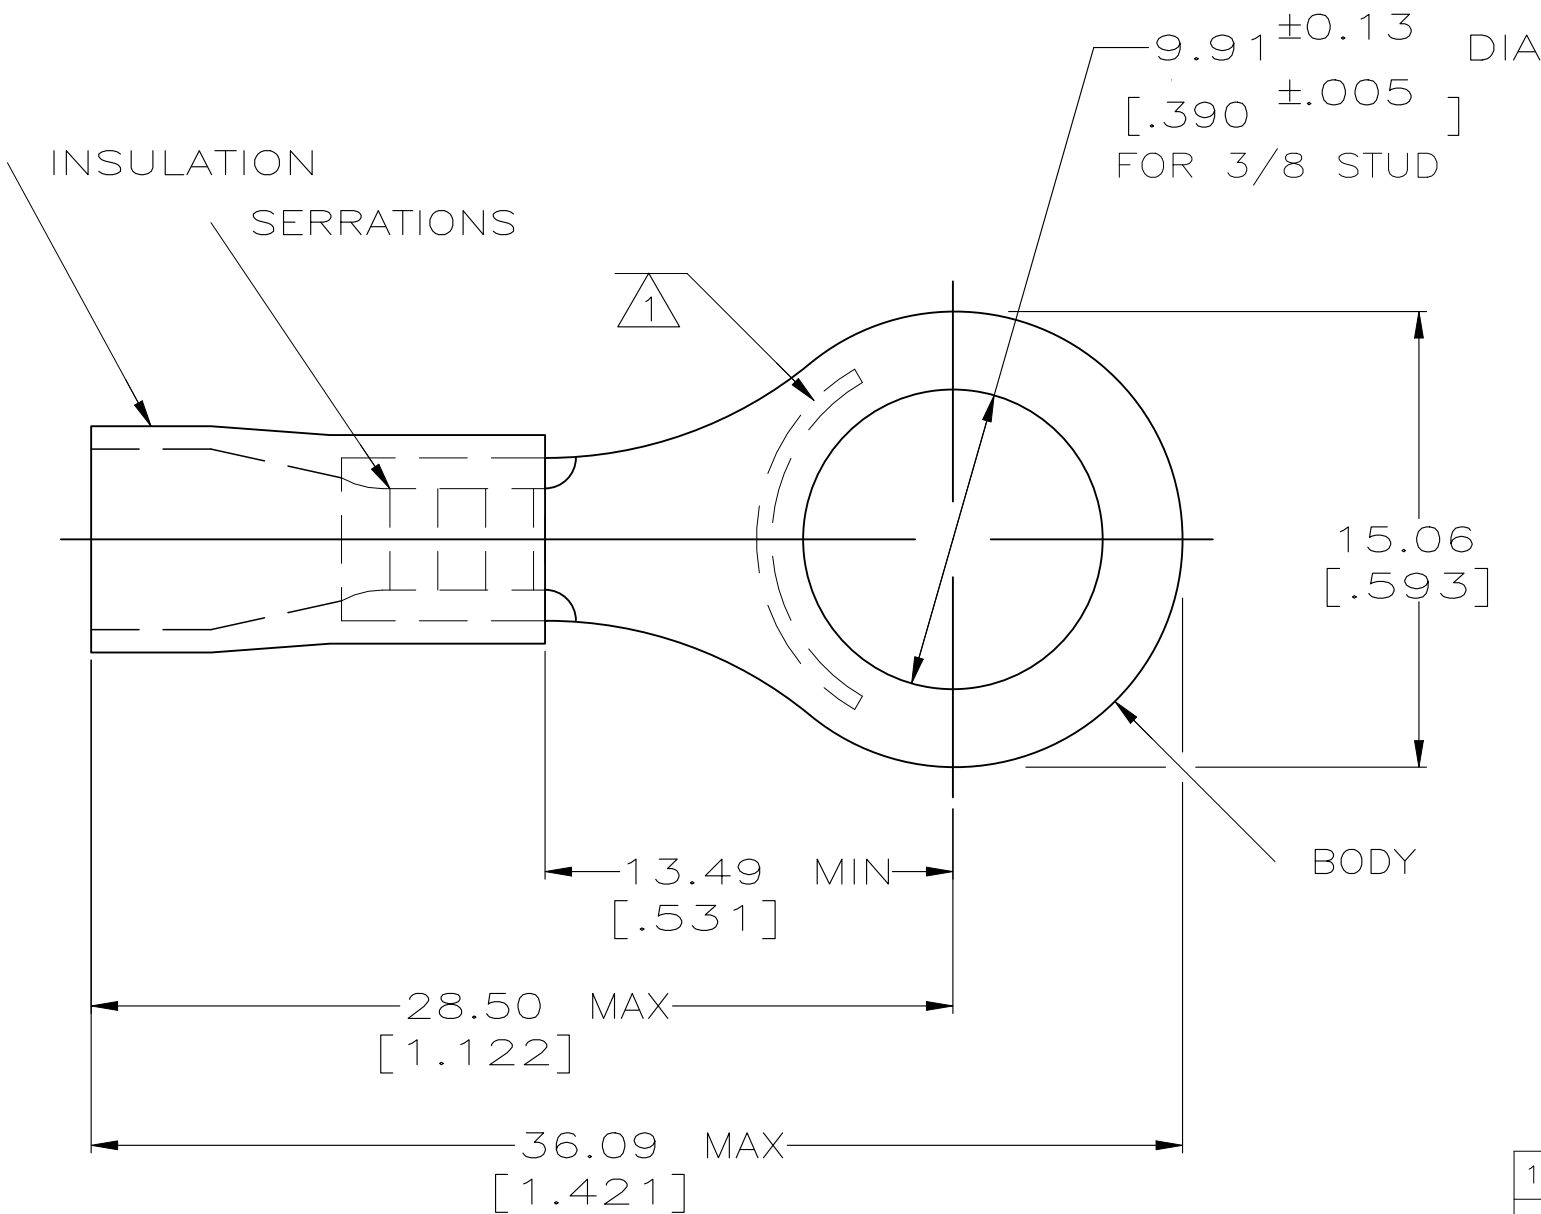

1 KIT = 100 PIECES	LOOSE PIECE	6-34173-0
1000	ON TAPE, REEL	2-34173-1
500	LOOSE PIECE	34173
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142


MAX RECOMMENDED OPERATING
TEMPERATURE:
105°C [221°F]

VOLTAGE RATING:
N/A

CIRCULAR MIL AREA:
2.62-6.64mm² [5180-13100]
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± 0.20[.008]
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

MATERIAL

4

DWN DK SCHRUM 08/06/92
CHK RE HERSEY 11/10/92
APVD M ELLIS 11/10/92
PRODUCT SPEC 108-1034
APPLICATION SPEC NOT AVAILABLE
WEIGHT -

 TE Connectivity
NAME
TERMINAL, RING TONGUE, PLASTI-GRIP,
WIRE SIZE: 12-10 AWG
-
SIZE CAGE CODE DRAWING NO RESTRICTED TO
A3 00779 C-34173 -

CUSTOMER DRAWING

SCALE 4:1
SHEET 1 OF 1
REV V3

1470-19 (1/15)