



WARNING - THIS DOCUMENT CONTAINS TECHNOLOGY WHOSE EXPORT IS RESTRICTED BY THE EXPORT ADMINISTRATION REGULATIONS ("EAR") PURSUANT TO 15 C.F.R. PARTS 730-774. VIOLATIONS OF THE EAR ARE SUBJECT TO SEVERE CRIMINAL PENALTIES UNDER THE EXPORT CONTROL REFORM ACT, AS AMENDED (TITLE 50, U.S.C., SEC. 4801, ET SEQ.).

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	M	REV PER ECN-24-272020	26JUN2024	LP	JG

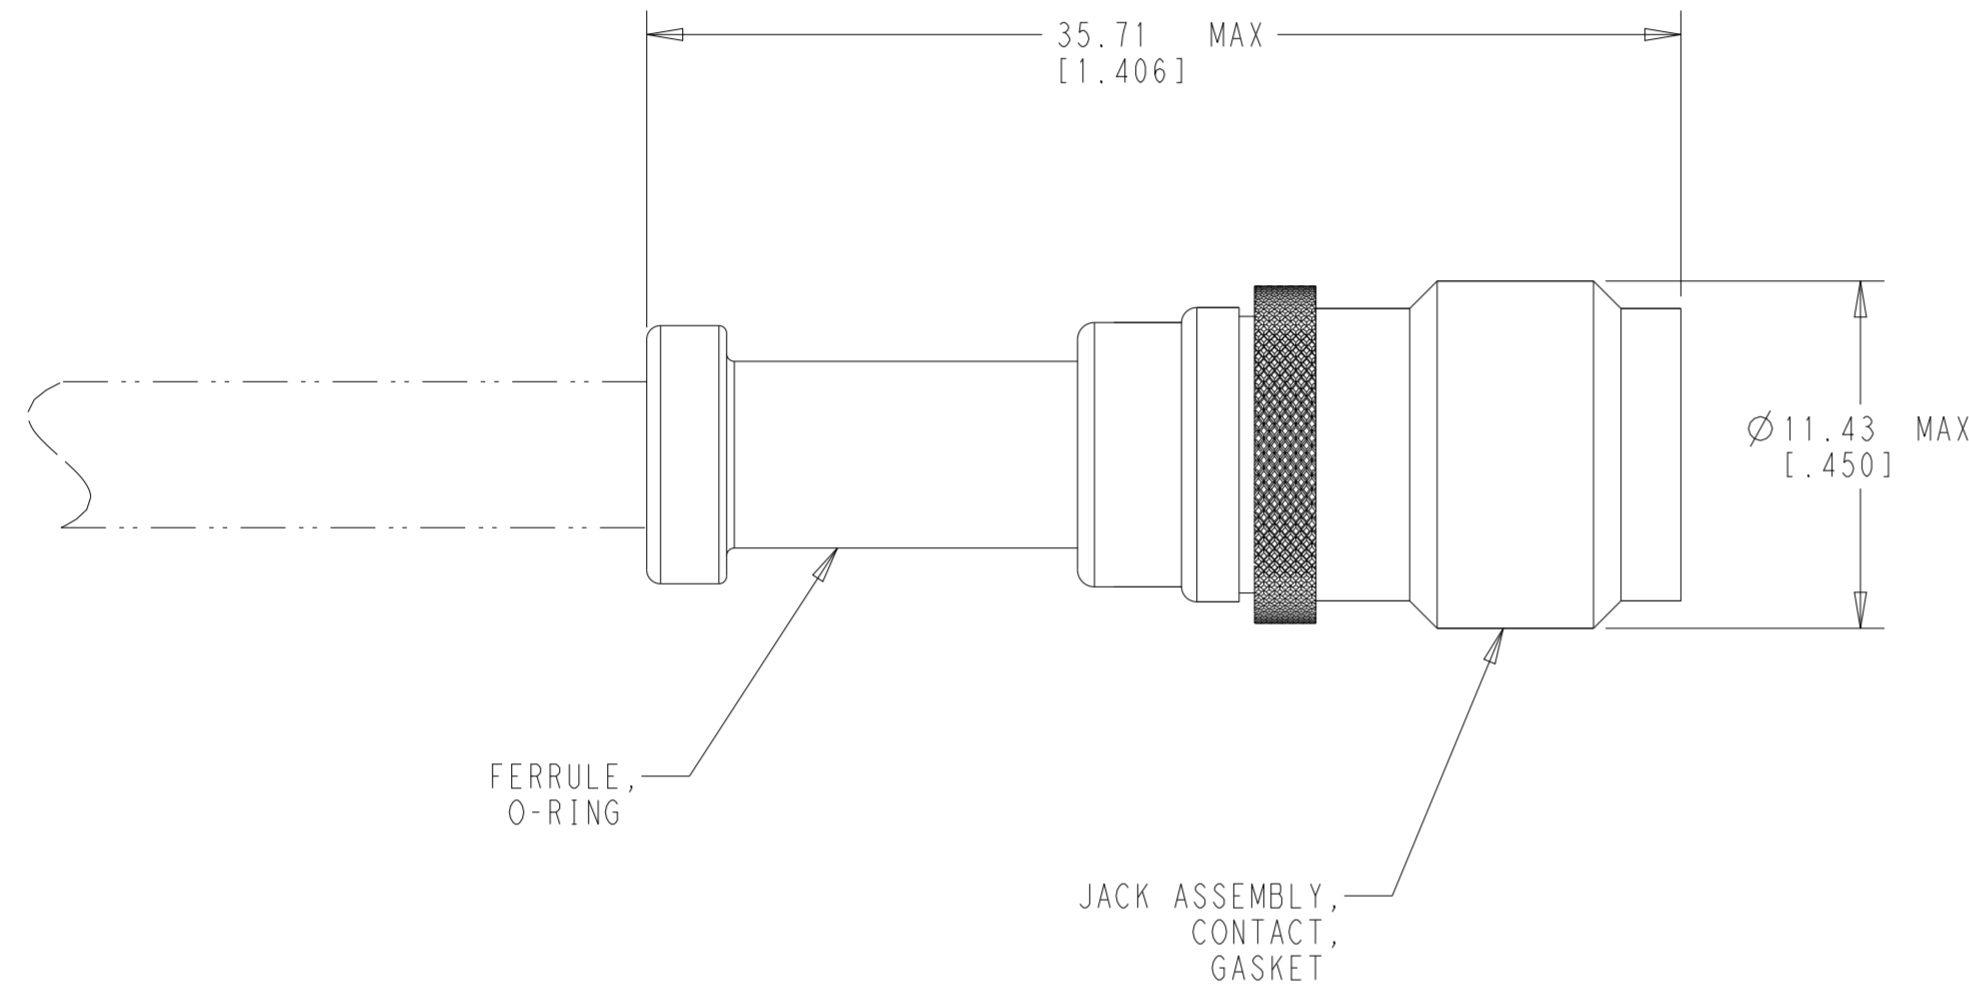

INNER FERRULE	BRASS PER ASTM B16 OR B36	SILVER PLATE PER ASTM B700
DIELECTRIC	PTFE FLOUROCARBON PER ASTM-D-1457	N/A
SHELL	BRASS PER ASTM B16	SILVER PLATE PER ASTM B700
CONTACT	BeCu PER ASTM B196	GOLD PLATE PER ASTM B488 OVER NICKEL PLATE PER SAE-AMS-QQ-N-290
CRIMP FERRULE	COPPER OR BRASS ALLOY ROCKWELL B 45 MAX	SILVER PLATE PER ASTM B700
O-RING	SILICONE RUBBER PER A-A-59588	N/A
GASKET	SILICONE RUBBER PER A-A-59588	N/A
COMPONENT	MATERIAL	FINISH

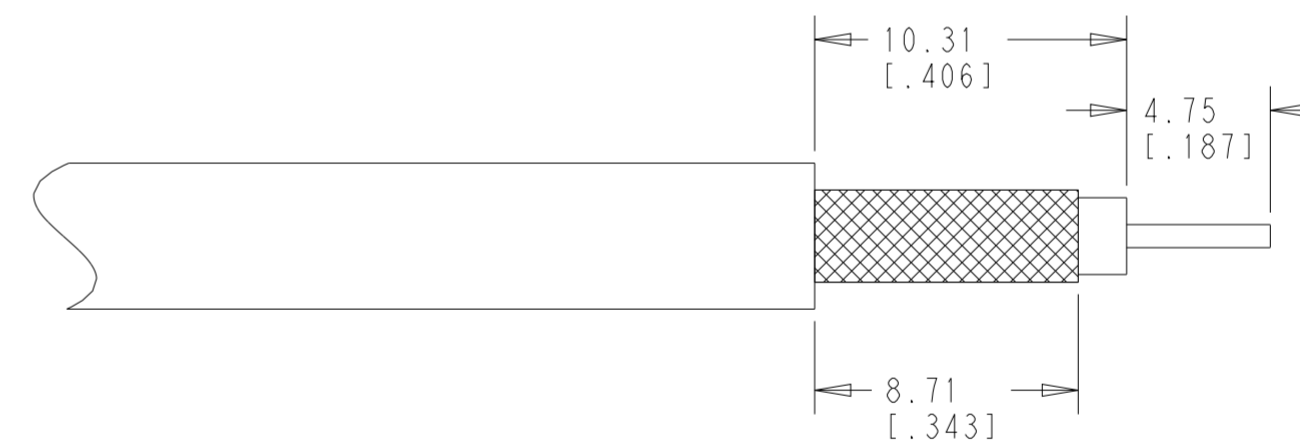

RECOMMENDED STRIP LENGTH

NOTES:
1. SEE 408-2299-2 FOR ASSEMBLY INSTRUCTIONS.

RG-142/U, 142A/U & 142B/U	00779 M39012/27B0006 YY WW	220045-2	225551-6
RG-141/U & 141A/U	00779 M39012/27B0015 YY WW	220045-2	225551-5
CABLE SIZE	STAMPING	CRIMP TOOL	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L PROSPER 14JUN2024	TE Connectivity
DIMENSIONS: mm [in]		CHK J. GUNDERMANN 14JUN2024	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. WILSON 14JUN2024	
0 PLC ± 1 PLC ± 2 PLC ±0.41 [0.016] 3 PLC ± 4 PLC ± ANGLES ± FINISH -		NAME JACK, WEATHERPROOF, SERIES TNC PRODUCT SPEC - APPLICATION SPEC 108-12001 WEIGHT - CUSTOMER DRAWING	
		SIZE A2	CAGE CODE 00779
		DRAWING NO C-225551	RESTRICTED TO -
		SCALE 4:1	SHEET 1 OF 1
			REV M